


階段踏板用


■材質 グレーチング：スチール製SS400

■表面処理 グレーチング：溶融亜鉛メッキ


■構造

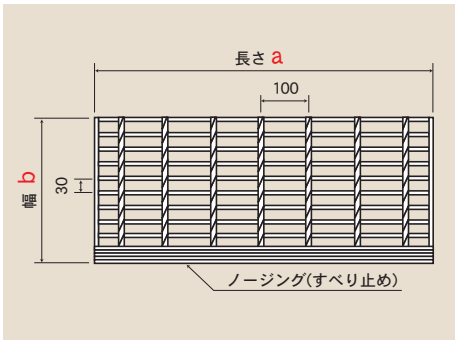

■溶接固定式(STW)

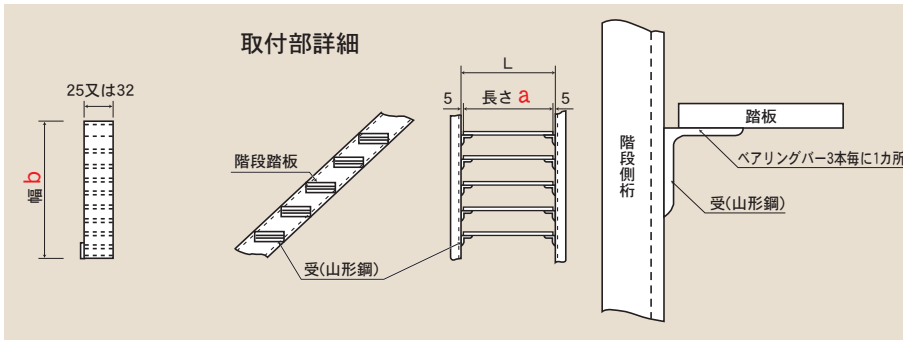

■ボルト固定式(STB)

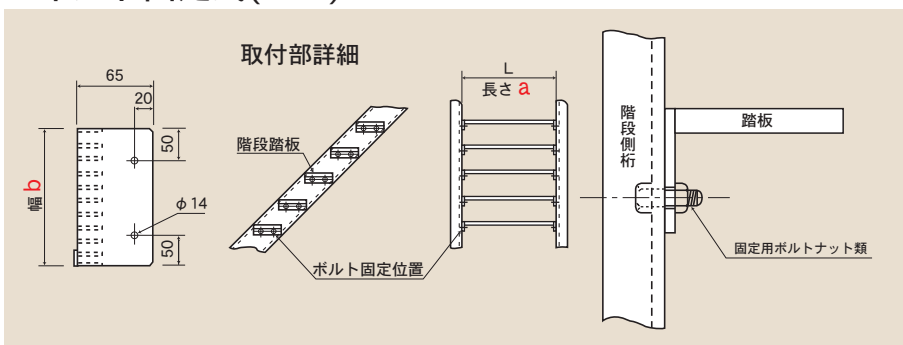

■標準寸法・重量表(kg/枚)

型式	長さ a mm	500		600		700		800		900		1000		
		重量 Kg/枚	STW	STB	STW	STB	STW	STB	STW	STB	STW	STB	STW	STB
F-25 FB25X3	幅 b mm	213	2.9	3.8	3.5	4.3	4.1	4.9	4.7	5.5	5.3	6.0	5.9	6.6
		243	3.3	4.2	3.9	4.9	4.6	5.5	5.3	6.1	5.9	6.7	6.6	7.4
		273	3.6	4.7	4.4	5.4	5.1	6.1	5.8	6.8	6.5	7.5	7.3	8.2
I-25 IB25X5X3		215	3.6	4.5	4.4	5.2	5.1	5.9	5.8	6.6	6.6	7.3	7.3	8.0
		245	4.1	5.1	4.9	5.9	5.7	6.7	6.6	7.5	7.4	8.2	8.2	9.0
		275	4.5	5.7	5.5	6.5	6.4	7.4	7.3	8.3	8.2	9.2	9.1	10.0
F-32 FB32X3		213	3.6	4.4	4.3	5.0	5.0	5.7	5.7	6.4	6.4	7.0	7.1	7.8
		243	4.0	4.9	4.8	5.7	5.6	6.4	6.4	7.2	7.2	8.0	8.0	8.7
		273	4.4	5.5	5.3	6.3	6.2	7.2	7.1	8.0	8.0	8.9	8.9	9.7
I-32 IB32X5X3		215	4.5	5.3	5.4	6.1	6.2	7.0	7.1	7.8	8.0	8.7	8.9	9.5
		245	5.0	5.9	6.0	6.9	7.0	7.9	8.0	8.8	9.0	9.8	10.0	10.7
		275	5.6	6.6	6.7	7.7	7.8	8.7	8.9	9.8	10.0	10.9	11.2	11.9

●上記寸法は標準品ですが、その他ご希望の寸法でも製作致します。