


階段踏板用


■材 質 グレーチング：スチール製SS400

■表面処理 グレーチング：溶融亜鉛メッキ


■構造

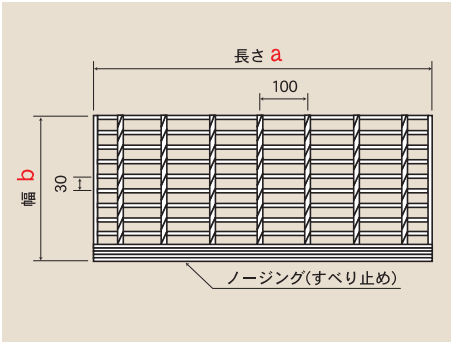

■溶接固定式(STW)

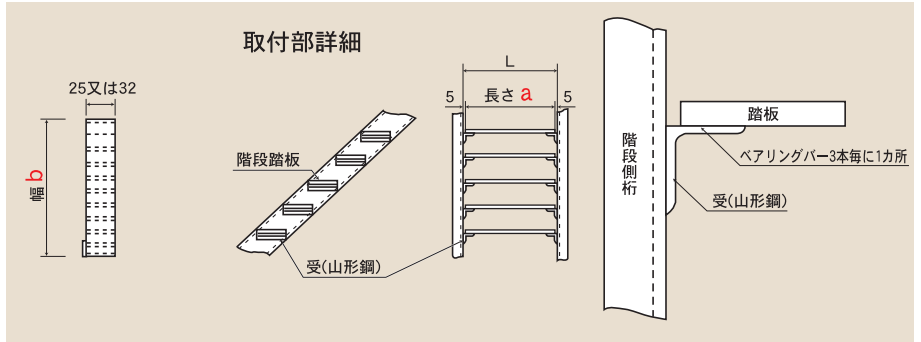

■ボルト固定式(STB)

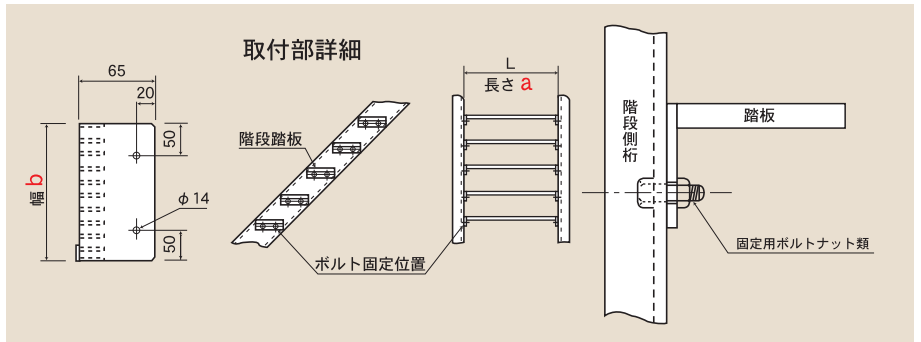

■標準寸法・重量表(kg/枚)

固定方法	型 式	高さ	幅 (b) mm	長 さ (a) mm								主部材	
				500	600	700	800	900	1000	1100	1200		
溶接固定式 (W)	3STW25	25	213	2.9	3.5	4.1							FB25X3
			243	3.3	3.9	4.6							
			273	3.6	4.4	5.1							
	STW25	25	215	3.6	4.4	5.1	5.8						I-25X5X3
			245	4.1	4.9	5.7	6.6						
			275	4.5	5.5	6.4	7.3						
	3STW32	32	213	3.6	4.3	5.0	5.7	6.4	7.1				FB32X3
			243	4.0	4.8	5.6	6.4	7.2	8.0				
			273	4.4	5.3	6.2	7.1	8.0	8.9				
	STW32	32	215	4.5	5.4	6.2	7.1	8.0	8.9				I-32X5X3
			245	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0		
			275	5.6	6.7	7.8	8.9	10.0	11.2	12.2	13.3		
ボルト固定式 (B)	3STB25	25	213	3.8	4.3	4.9							FB25X3
			243	4.2	4.9	5.5							
			273	4.7	5.4	6.1							
	STB25	25	215	4.5	5.2	5.9	6.6						I-25X5X3
			245	5.1	5.9	6.7	7.5						
			275	5.7	6.5	7.4	8.3						
	3STB32	32	213	4.4	5.0	5.7	6.4	7.0	7.8				FB32X3
			243	4.9	5.7	6.4	7.2	8.0	8.7				
			273	5.5	6.3	7.2	8.0	8.9	9.7				
	STB32	32	215	5.3	6.1	7.0	7.8	8.7	9.5	10.3	11.1		I-32X5X3
			245	5.9	6.9	7.9	8.8	9.8	10.7	11.6	12.6		
			275	6.6	7.7	8.7	9.8	10.9	11.9	12.9	14.0		

※上記寸法は標準品です。

その他の寸法ならびにノンスリップの対応も可能です。ご相談ください。

※荷重条件：集中荷重1.0kN

$$\frac{\text{たわみ}}{\text{支間}} : \frac{1}{300} \text{ 以下}$$

(重量：kg/枚)