



KNSG


側溝用(FBタイプ)

■型式記号の意味は次の通りです。


KNSG 側溝用 (FBタイプ)

P ピッチ 30・22・20・15・13・10

■材質 ステンレス製SUS304

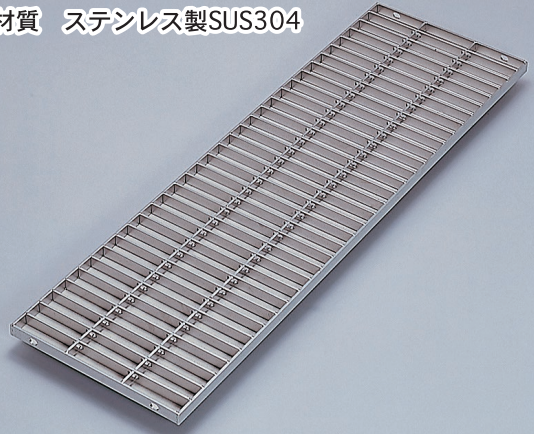

型式 記号	みぞ幅 ($\varnothing$) mm	本体寸法 mm $a \times b \times h$	P 3 0			P 2 2			P 2 0		
			耐荷重 機用/側溝用	重量 (kg/枚)	価 格 (円/枚)	耐荷重 機用/側溝用	重量 (kg/枚)	価 格 (円/枚)	耐荷重 機用/側溝用	重量 (kg/枚)	価 格 (円/枚)
KNSG	100	150×994×15	T-2	3.9	15,400	T-2	4.8	19,300	T-2	5.4	21,200
		150×994×20	T-20	4.8	18,000	T-20	5.8	23,700	T-20	6.2	26,200
		150×994×25	T-20	5.8	24,600	T-20	7.2	30,200	T-20	7.6	33,200
		150×994×32	T-20	7.4	30,200	T-20	9.1	37,300	T-20	9.7	41,100
	150	200×994×15	歩道用	4.7	18,800	歩道用	5.8	24,500	T-2	6.8	26,900
		200×994×20	T-2/T-14	5.8	25,000	T-6/T-14	7.3	30,600	T-14/T-20	7.7	33,700
		200×994×25	T-14	7.2	29,200	T-20	9.0	37,600	T-20	9.6	41,300
		200×994×32	T-20	9.1	37,300	T-20	11.5	45,400	T-20	12.2	49,900
	200	250×994×15	歩道用	5.5	23,900	歩道用	6.9	30,400	歩道用	8.1	33,600
		250×994×20	歩道用/T-2	6.9	29,900	T-2	8.7	39,500	T-2/T-6	9.4	43,500
		250×994×25	T-2/T-6	8.5	38,200	T-2/T-14	11.0	47,400	T-6/T-14	11.6	52,200
		250×994×32	T-14/T-20	10.9	46,000	T-20	13.8	56,900	T-20	14.8	62,600
		250×994×38	T-20	12.8	53,600	T-20	16.3	66,500	T-20	17.5	73,300
	250	300×994×15	歩道用	6.9	27,800	歩道用	8.7	35,600	歩道用	10.2	39,300
		300×994×20	歩道用	8.5	36,700	歩道用/T-2	10.7	45,300	歩道用/T-2	11.4	49,800
		300×994×25	歩道用/T-2	10.3	43,400	T-2	13.1	54,400	T-2	14.1	59,800
		300×994×32	T-2/T-6	13.1	52,600	T-6/T-14	16.6	65,300	T-14/T-20	17.5	71,800
		300×994×38	T-14	15.3	61,400	T-14/T-20	19.6	76,800	T-20	21.0	84,500
		300×994×45	T-14/T-20	17.7	70,500	T-20	22.6	92,800	T-20	24.3	102,100
		300×994×50	T-20	20.0	74,600	T-20	25.5	100,500	T-20	27.5	110,600
	300	350×994×15	歩道用	8.3	33,100	歩道用	9.9	43,300	歩道用	11.8	47,600
		350×994×20	歩道用	9.6	40,700	歩道用/T-2	12.2	52,300	歩道用/T-2	13.1	57,700
		350×994×25	歩道用/T-2	11.7	51,100	T-2	14.9	64,200	T-2	16.0	70,700
		350×994×32	T-2	14.8	61,900	T-2/T-6	18.9	77,000	T-2/T-14	20.4	84,800
		350×994×38	T-2/T-6	17.4	71,700	T-14	22.3	89,900	T-14/T-20	24.0	98,900
		350×994×45	T-14	20.1	86,000	T-14/T-20	25.8	108,500	T-20	27.8	119,400
	350	350×994×50	T-14/T-20	22.7	92,400	T-20	29.2	117,300	T-20	31.5	129,100
		400×994×15	歩道用	9.5	36,100	歩道用	11.2	48,500	歩道用	13.0	53,300
		400×994×20	歩道用	11.1	47,700	歩道用	14.1	58,000	歩道用	15.1	63,800
		400×994×25	歩道用	13.5	56,500	歩道用/T-2	17.2	71,200	歩道用/T-2	18.5	78,400
		400×994×32	歩道用/T-2	17.0	68,300	T-2	21.7	85,500	T-2	23.4	94,000
		400×994×38	T-2	19.9	79,500	T-2/T-6	25.6	100,200	T-6/T-14	27.1	110,200
		400×994×45	T-2/T-6	22.9	94,700	T-14	29.5	121,000	T-14/T-20	31.5	133,100
	400	400×994×50	T-14	25.9	101,700	T-20	33.4	130,900	T-20	35.9	144,000
		450×994×15	歩道用	10.0	41,300	歩道用	12.1	53,600	歩道用	14.4	59,000
		450×994×20	歩道用	12.2	54,400	歩道用	15.5	66,500	歩道用	16.7	73,300
		450×994×25	歩道用	14.7	64,100	歩道用/T-2	19.1	81,000	歩道用/T-2	20.5	89,300
		450×994×32	歩道用/T-2	18.7	77,200	T-2	24.1	96,900	T-2	25.9	106,600
		450×994×38	T-2	22.0	89,700	T-2	28.4	113,400	T-2/T-6	31.5	124,700
		450×994×45	T-2	25.3	106,100	T-6/T-14	32.8	136,500	T-14	35.7	150,300
	450	450×994×50	T-2/T-6	28.6	113,500	T-14	37.1	147,700	T-14	39.9	162,500
		500×994×15	歩道用	11.0	44,700	歩道用	13.8	58,800	歩道用	16.2	64,700
		500×994×20	歩道用	13.7	58,600	歩道用	17.4	72,000	歩道用	18.7	79,200
		500×994×25	歩道用	16.7	69,400	歩道用	21.3	87,900	歩道用/T-2	22.9	96,800
		500×994×32	歩道用/T-2	21.0	83,700	歩道用/T-2	26.9	105,200	T-2	29.0	115,900
		500×994×38	T-2	24.5	97,300	T-2	31.6	123,200	T-2	34.0	135,500
		500×994×45	T-2	28.1	115,200	T-2/T-6	36.5	148,900	T-6	39.2	163,800
		500×994×50	T-2/T-6	31.6	123,200	T-6/T-14	41.3	161,300	T-14	44.4	177,400

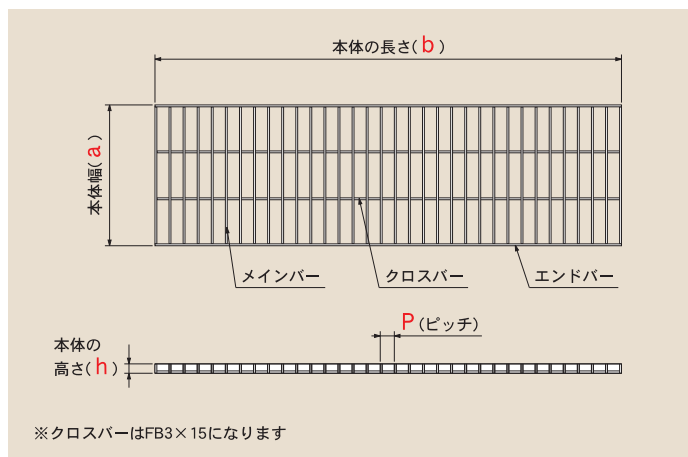

型式 記号	みぞ幅 (ϕ) mm	本体寸法 mm $a \times b \times h$	P15			P13(b寸992)			P10		
			耐荷重 横断用/側溝用	重量 (kg/枚)	価 格 (円/枚)	耐荷重 横断用/側溝用	重量 (kg/枚)	価 格 (円/枚)	耐荷重 横断用/側溝用	重量 (kg/枚)	価 格 (円/枚)
KNSG	100	150×994×15	T-2	6.3	24,600	T-2	7.3	28,400	T-2	8.7	35,200
		150×994×20	T-20	7.7	31,800	T-20	8.9	38,200	T-20	10.7	47,400
		150×994×25	T-20	9.5	40,600	T-20	11.0	44,800	T-20	13.3	55,500
		150×994×32	T-20	12.2	49,000	T-20	14.0	57,300	T-20	16.9	71,200
	150	200×994×15	T-2	7.8	31,400	T-2	9.0	35,800	T-2	10.9	44,200
		200×994×20	T-20	9.8	41,600	T-20	11.4	48,000	T-20	13.8	59,600
		200×994×25	T-20	12.1	50,600	T-20	14.1	57,300	T-20	17.2	71,200
		200×994×32	T-20	15.6	60,800	T-20	18.1	72,600	T-20	22.0	90,000
	200	250×994×15	T-2	9.4	40,600	T-2	11.0	45,900	T-2	13.3	56,900
		250×994×20	T-2/T-14	12.0	53,400	T-6/T-14	14.0	60,200	T-14/T-20	17.1	74,700
		250×994×25	T-14/T-20	14.8	63,600	T-20	17.3	72,000	T-20	21.2	89,400
		250×994×32	T-20	19.0	76,800	T-20	22.2	95,900	T-20	26.9	119,000
	250	250×994×38	T-20	22.5	90,400	T-20	26.3	102,800	T-20	32.1	127,500
		300×994×15	歩道用/T-2	11.7	47,700	歩道用/T-2	13.6	53,600	T-2	16.5	66,500
		300×994×20	T-2	14.6	61,300	T-2	17.0	70,500	T-2/T-14	20.7	87,400
		300×994×25	T-2/T-14	18.0	74,600	T-14	21.0	83,900	T-14/T-20	25.6	104,200
		300×994×32	T-14/T-20	22.9	88,700	T-20	26.8	105,500	T-20	32.7	130,900
		300×994×38	T-20	27.0	104,900	T-20	31.6	120,300	T-20	38.6	149,200
		300×994×45	T-20	31.2	126,300	T-20	36.6	149,100	T-20	44.7	184,800
		300×994×50	T-20	35.4	137,000	T-20	41.5	163,800	T-20	50.8	203,200
	300	350×994×15	歩道用	14.0	57,500	歩道用	16.2	64,600	歩道用/T-2	19.7	80,200
		350×994×20	歩道用/T-2	16.7	73,000	T-2	19.5	83,500	T-2	23.9	103,400
		350×994×25	T-2	20.6	88,500	T-2/T-6	24.1	99,100	T-6/T-14	29.6	122,900
		350×994×32	T-14	26.3	105,200	T-14/T-20	30.8	125,100	T-20	37.8	155,100
		350×994×38	T-20	31.0	123,600	T-20	36.4	142,400	T-20	44.7	176,700
		350×994×45	T-20	35.9	148,700	T-20	42.2	176,800	T-20	51.8	219,300
	350	350×994×50	T-20	40.8	160,700	T-20	47.9	194,100	T-20	58.8	240,800
		400×994×15	歩道用	15.1	63,200	歩道用	17.6	70,700	歩道用	21.4	87,700
		400×994×20	歩道用/T-2	19.3	81,300	歩道用/T-2	22.5	93,400	T-2	27.5	115,800
		400×994×25	T-2	23.8	98,500	T-2	27.8	110,700	T-2/T-6	34.0	137,300
		400×994×32	T-2/T-6	30.2	117,100	T-6/T-14	35.4	139,100	T-14/T-20	43.4	172,500
		400×994×38	T-14	35.6	138,000	T-14/T-20	41.7	158,400	T-20	50.8	196,500
		400×994×45	T-20	40.1	166,100	T-20	48.2	196,600	T-20	59.1	243,800
		400×994×50	T-20	44.6	179,900	T-20	54.7	215,800	T-20	67.3	267,600
	400	450×994×15	歩道用	17.0	71,700	歩道用	19.7	80,100	歩道用	24.0	99,300
		450×994×20	歩道用/T-2	21.4	93,100	歩道用/T-2	25.1	106,600	歩道用/T-2	30.6	132,200
		450×994×25	歩道用/T-2	26.4	112,400	T-2	31.0	126,200	T-2	38.0	156,400
		450×994×32	T-2/T-6	33.6	133,100	T-2	39.4	157,800	T-14	48.5	195,700
		450×994×38	T-14	39.6	156,800	T-14	46.6	179,400	T-20	57.3	222,700
		450×994×45	T-14/T-20	45.8	180,100	T-20	53.9	222,900	T-20	66.3	276,400
	450	450×994×50	T-20	52.0	191,700	T-20	61.1	244,700	T-20	75.3	303,400
		500×994×15	歩道用	18.8	78,500	歩道用	21.9	87,400	歩道用	26.7	108,400
		500×994×20	歩道用	24.0	100,800	歩道用/T-2	28.4	116,300	歩道用/T-2	34.4	144,200
		500×994×25	歩道用/T-2	29.6	122,300	歩道用/T-2	34.6	137,900	T-2	42.3	171,100
		500×994×32	T-2	37.5	144,900	T-2	44.0	172,900	T-6	54.1	214,400
		500×994×38	T-2/T-6	44.2	170,900	T-6/T-14	51.9	196,800	T-14	63.8	244,000
		500×994×45	T-14	51.0	205,200	T-14	60.0	244,200	T-20	73.8	302,900
		500×994×50	T-20	57.8	222,700	T-20	68.0	268,200	T-20	83.8	332,600

※車両が頻繁に通行する場所や、フォークリフトなどの特殊車両が進行する場所には適しません。

●標準サイズ以外の場合は別途お見積いたします。